

SOIL CLASS: 40B CHATFIELD-HOLLIS-CANTON  
538 SQUAMSCOTT

(SOURCE: USDA-SCS SOIL SURVEY)

BENCH MARKS: ASSUMED DATUM

- #1 SET PK ELEV 59.78  
#2 SET PK ELEV 55.60  
#3 COR BOTTOM STEP ELEV 60.09

DESIGN INTENT: FOR PROPOSED 15'X35'  
LEACHING AREA  
THE BOTTOM OF THE EFFLUENT DISPOSAL SYSTEM (EDS)  
SHALL BE CONSTRUCTED AT ELEVATION 57.7  
WHICH IS APPROXIMATELY 22" ABOVE  
ORIGINAL GROUND AT THE HIGH CONTOUR OF THE DESIGNED (NEW)  
EDS (ELEVATION 55.9). (PREDEVELOPMENT OG)  
INTENT IS TO MATCH BED BOTTOM OF EXIS SYSTEM.


SUITABLE REPLACEMENT AREA:  
SYSTEM MUST BE REBUILT IN PLACE OR REDESIGNED.

LEGEND:

EXISTING CONTOUR  
PROPOSED CONTOUR  
EXISTING SPOT ELEVATION  
PROPOSED SPOT ELEVATION



NOTES:

- THIS PLAN IS NOT TO BE CONSTRUED AS A BOUNDARY SURVEY. PROPERTY LINES SHOWN ARE APPROXIMATED BASED ON INFORMATION FROM THE FOLLOWING SOURCE:  
RCRD PLAN D21631
- NHDES-WS&PCD SUBDIVISION APPROVAL NUMBER: 38490  
PREVIOUS APPROVAL #CA1996000002
- THIS SYSTEM IS NOT DESIGNED TO HANDLE GARBAGE DISPOSAL WASTE.
- LEACH FIELD SETBACKS:  
FROM WELL 100'+  
FROM HYDRIC B 100'+  
FROM HYDRIC A 100'+
- INSTALLER IS RESPONSIBLE FOR KNOWLEDGE OF AND COMPLIANCE WITH APPLICABLE TOWN ZONING AND BUILDING CODE REQUIREMENTS.
- EXISTING SYSTEM COMPONENTS TO BE INSPECTED FOR PROPER CONDITION AND FUNCTION AND REPAIRED AS NEEDED.
- NOTE UNDERGROUND UTILITIES TO BE MOVED. LOCATION TO BE VERIFIED BY DIGSAFE.

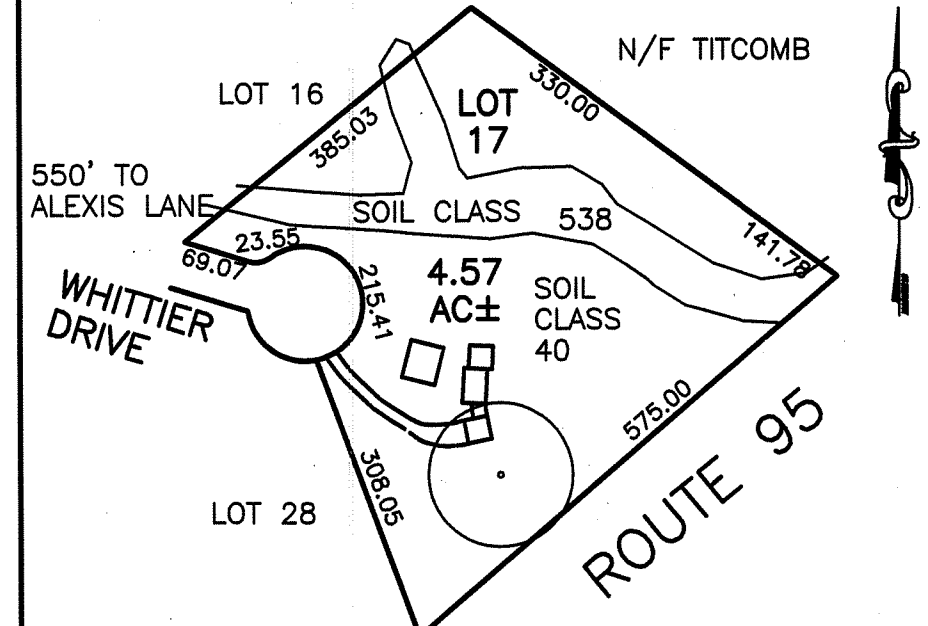


PLOT PLAN

1"=APPROX 200'

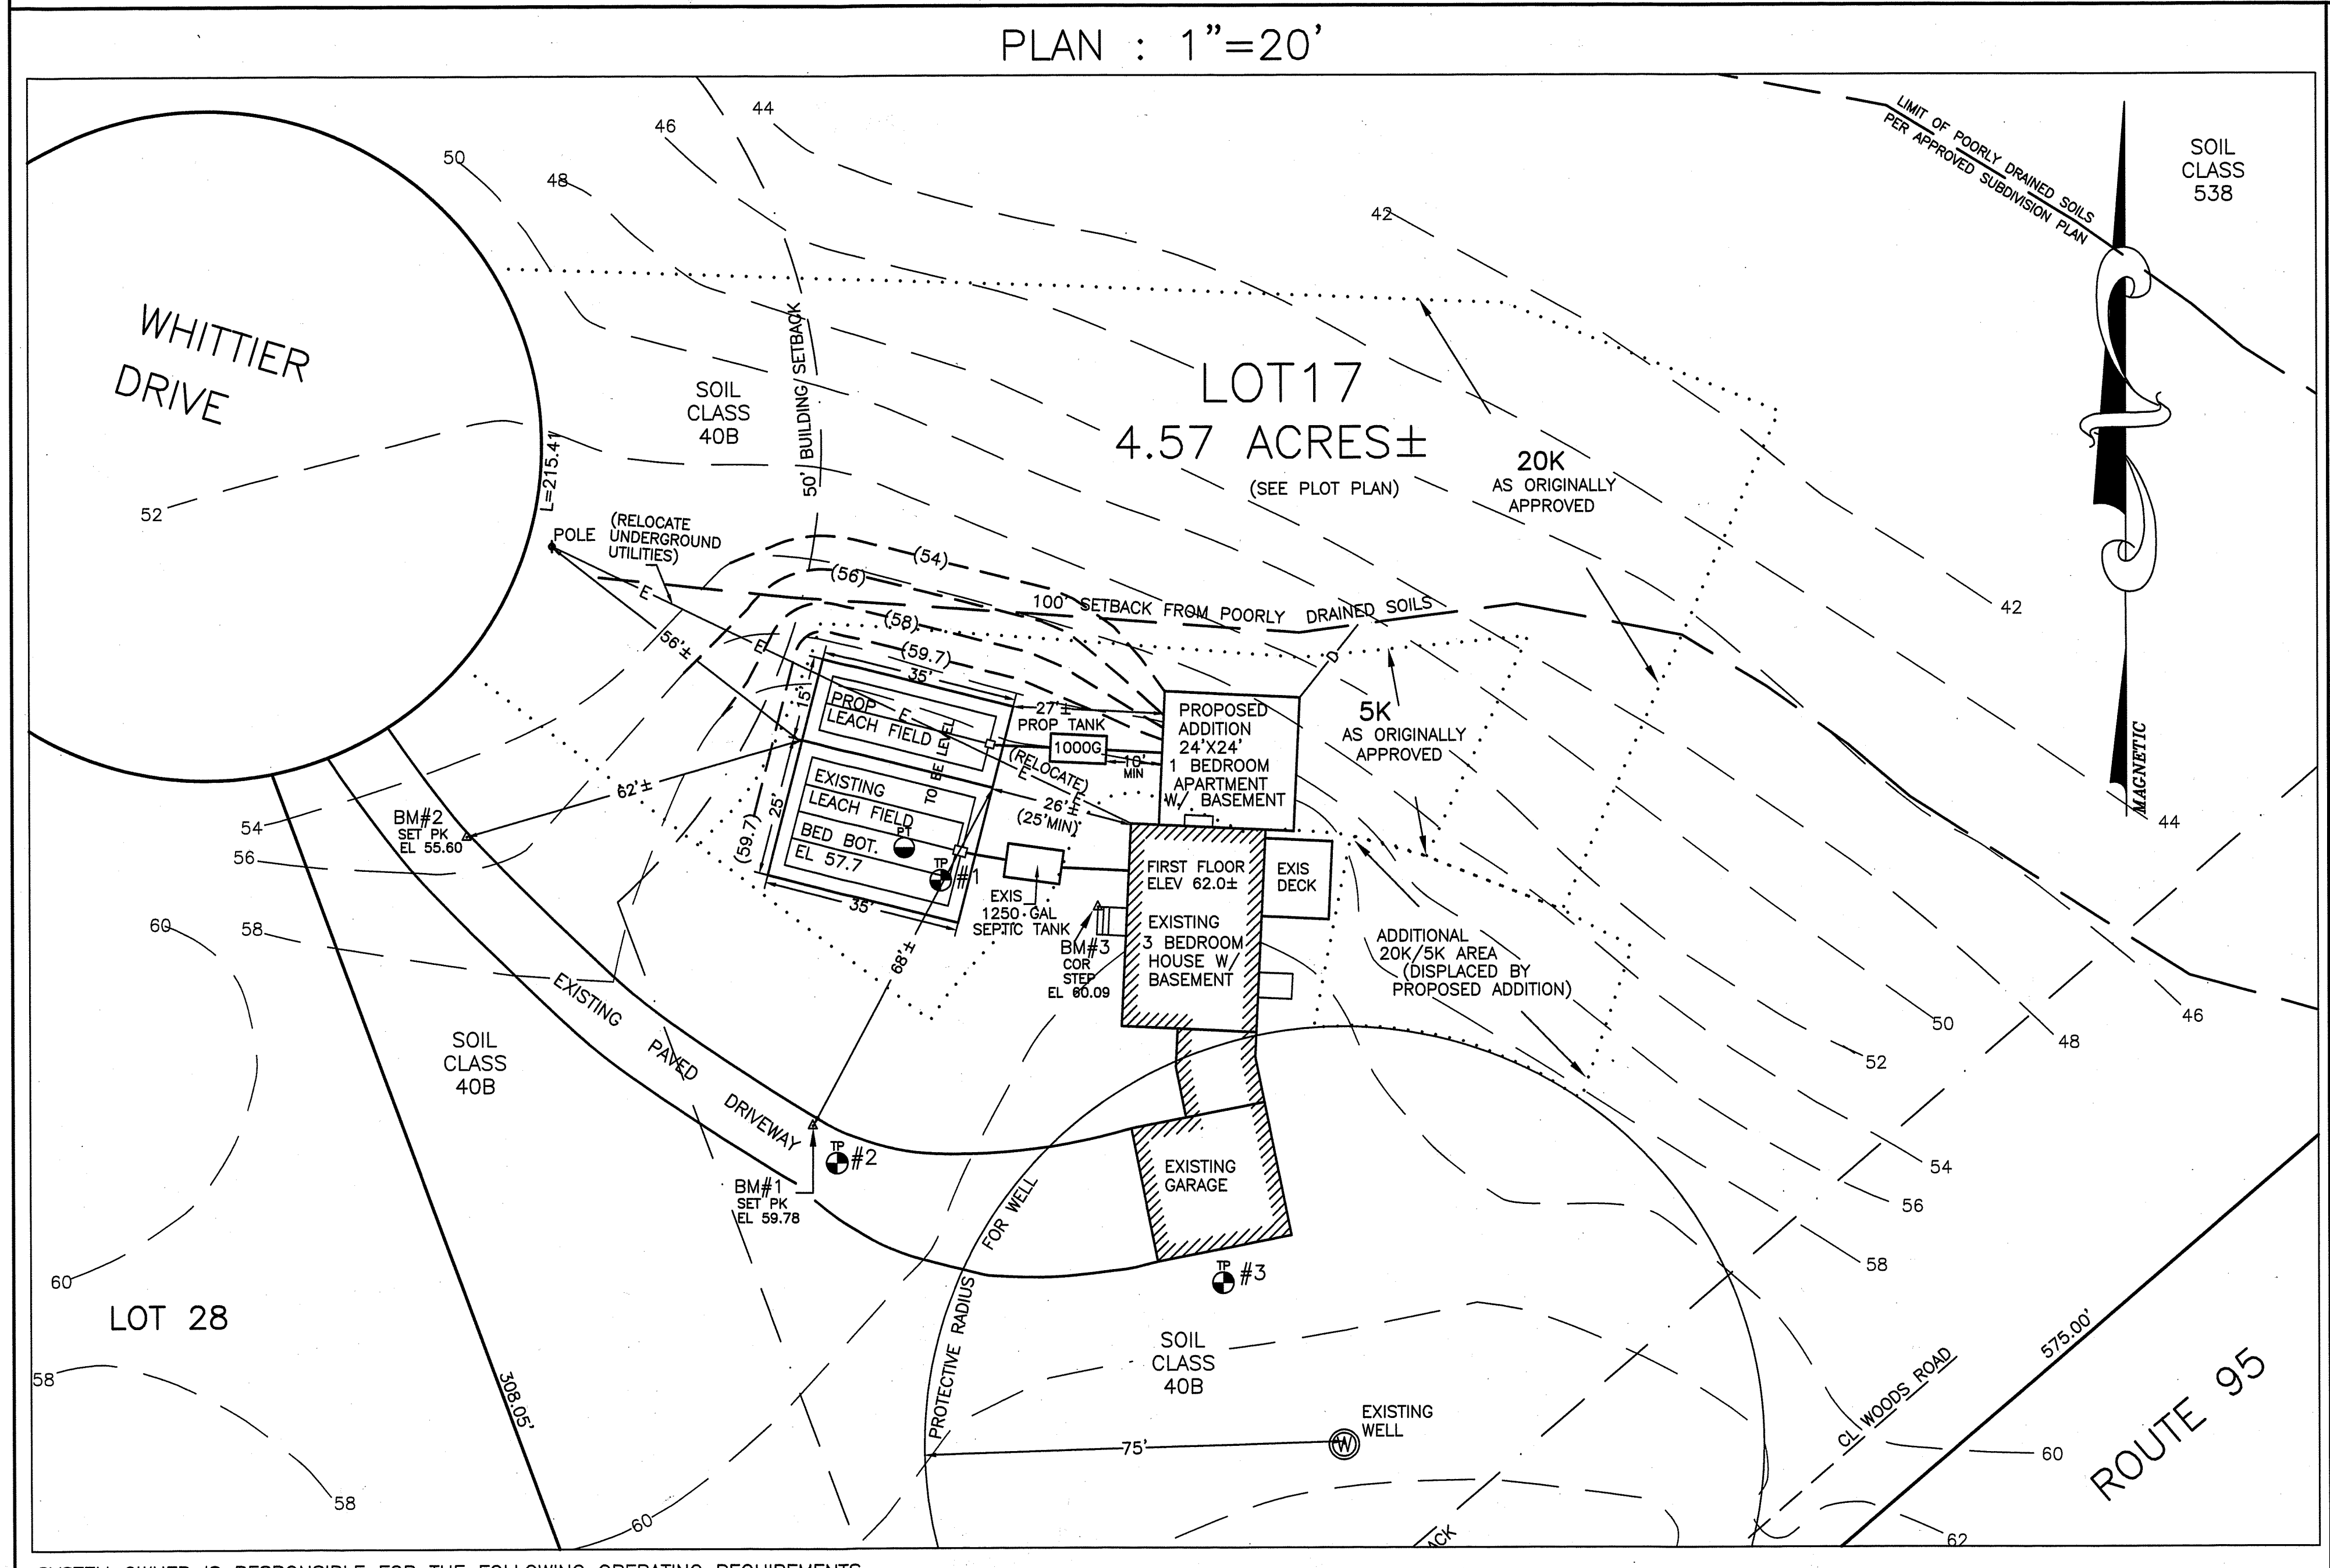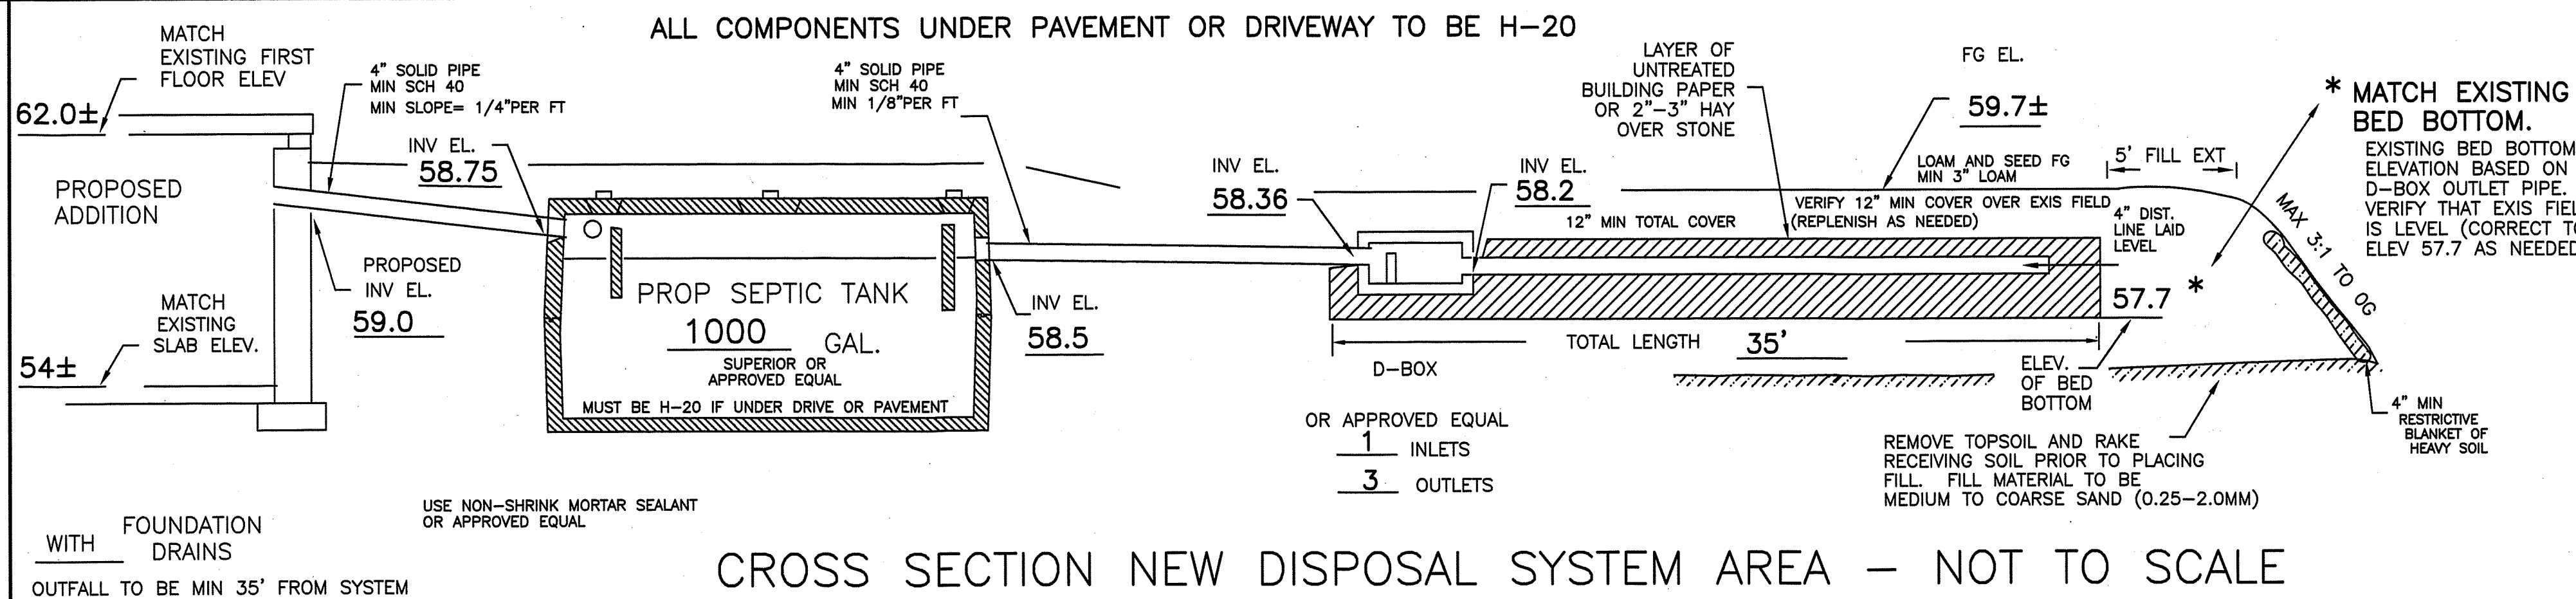

SYSTEM OWNER IS RESPONSIBLE FOR THE FOLLOWING OPERATING REQUIREMENTS

- ENV-WS 1023.01 (a) SEPTIC TANKS SHALL BE INSPECTED FOR ACCUMULATION OF SLUDGE AND SURFACE SCUM AT LEAST ONCE EVERY YEAR.  
(b) WHEN THE COMBINED THICKNESS OF SLUDGE AND SURFACE SCUM EQUAL 1/3 OR MORE OF THE TANK DEPTH, THE TANK SHALL BE PUMPED BY A LICENSED SEPTIC TANK PUMPER.  
ENV-WS 1023.02 TO PREVENT OBSTRUCTION OF THE DISTRIBUTION LINES AND LEACH FIELD, GREASE AND BULKY WASTE SHALL NOT BE FLUSHED OR OTHERWISE INTRODUCED INTO THE SEPTIC SYSTEM.
- ENV-WS 1023.03 TOXIC AND HAZARDOUS MATERIALS SHALL NOT BE FLUSHED OR OTHERWISE INTRODUCED INTO THE SEPTIC SYSTEM.  
ENV-WS 1023.04 TO PREVENT DAMAGE TO THE DISTRIBUTION LINES AND LEACH FIELD, VEHICLES, LIVESTOCK, AND OTHER HEAVY OBJECTS SHALL NOT BE ALLOWED ON THE LEACH FIELD.  
ENV-WS 1023.05 IF WET AREAS APPEAR ON THE GROUND SURFACE ABOVE THE DISTRIBUTION LINES OR LEACH FIELD OR IF DISAGREEABLE ODORS OCCUR, THE SYSTEM SHALL BE INSPECTED FOR THE SOURCE OF THESE PROBLEMS, AND CORRECTIVE ACTION SHALL BE TAKEN.

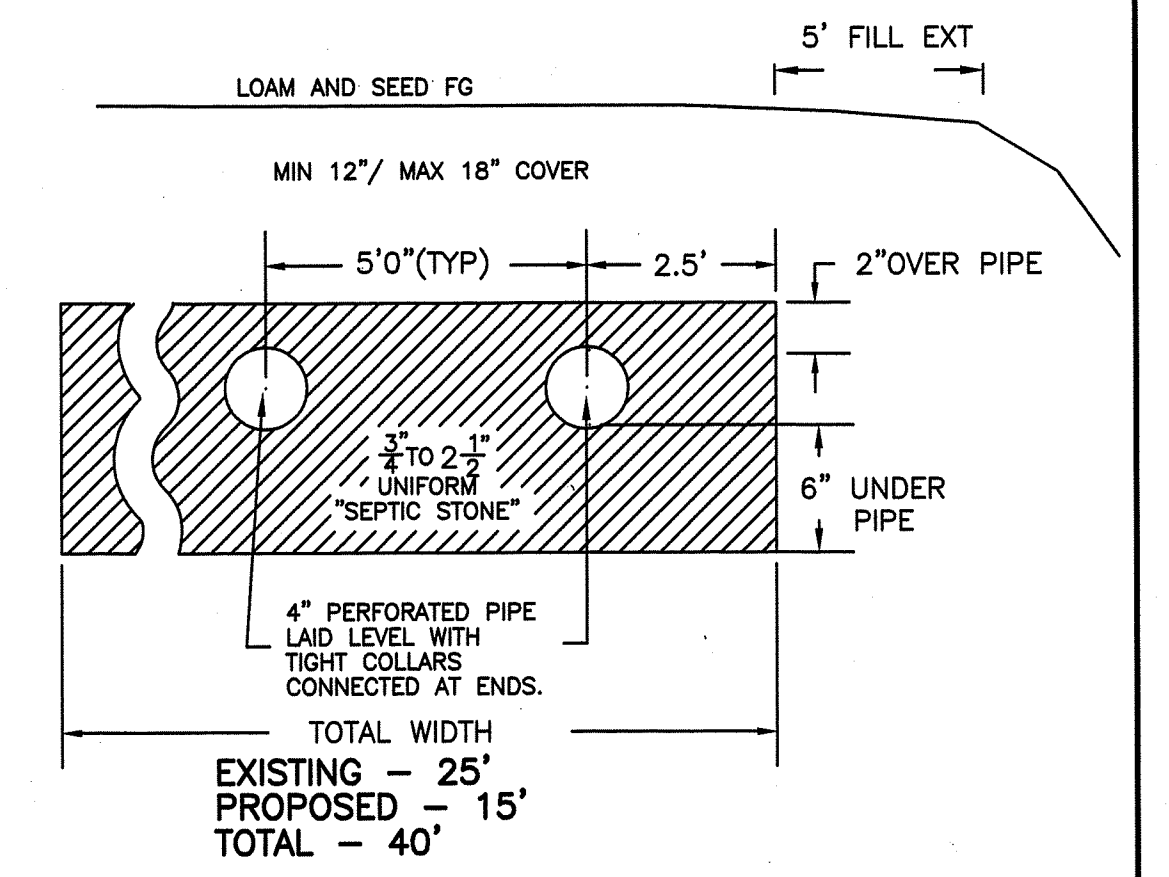

TEST PIT DATA

DATE:	11/7/95
TOWN INSPECTOR:	MIKE CUOMO
TEST PITS ARE REPRODUCED FROM ORIGINAL SEPTIC DESIGN BY STOCKTON SERVICES. REF APPROVAL #CA1996000002.	
#1	EL 56.8
0-6"	LOAM AND ROOT MAT
6-30"	10YR5/4 TO 5/6 GRAVELLY FINE SANDY LOAM, GRANULAR FRIABLE
30-72"	2.5Y5/4 FINE SANDY LOAM, FIRM, MIXED WITH GRAVELLY LOAMY SAND SOMEWHAT FIRM, (MOTTLED)
ESHWIT @ 30", ROOTS TO 30"+, NO OBS H2O, NO REFUSAL	
#2	EL 58.7
ESHWIT < 24"	
#3	EL 61.5
0-6"	LOAM AND ROOT MAT
6-26"	10YR5/4 TO 5/6 FINE SANDY LOAM, GRANULAR FRIABLE
26-80"	2.5Y5/4 GRAVELLY LOAMY SAND, SOMEWHAT FIRM, MOTTLED
ESHWIT @ 26", ROOTS TO 30"+, NO OBS H2O, NO REFUSAL	

PERC TEST DATA


DATE	11/7/95
PERC RATE:	6 MIN/IN SEE APP #CA1996000002
DESIGN LOADING:	EXIS 450 GPD + PROPOSED 225 GPD = (3 BEDROOM HOUSE = 1 BEDROOM APARTMENT) TOTAL 675 GPD DESIGN LOADING
AREA REQUIRED:	675 GPD/ 100 X 155 SF/100GAL = 1046 SF (NHDES) X 1.25 = 1307 SF REQUIRED (HAMPTON FALLS)
AREA PROPOSED:	EXISTING SYSTEM (25X35) + PROPOSED(15X35)= TOTAL 40' X 35' = 1400 SF PROVIDED.

PLAN OF PROPOSED EXPANSION OF EXISTING SEPTIC SYSTEM

LOT 17, WELLINGTON FARMS SUBDIVISION  
REF PREVIOUS APPROVAL #CA1996000002

LOCUS: 8 WHITTIER DRIVE  
HAMPTON FALLS, NH

OWNER: JAMES & LUANN STEVENS  
8 WHITTIER DRIVE  
HAMPTON FALLS, NH 03844

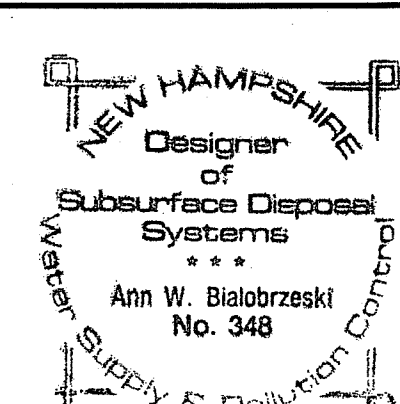

APPLICANT:  
STOCKTON SERVICES  
PO BOX 1306  
HAMPTON, NH 03843-1306

DATE: 3/26/03  
REVISED 4/11/03

APPROVAL: NOT SUBMITTED  
D DES

WITHDRAWN ZBA